

COMPRESSORI-ASPIRATORI A CANALE LATERALE

SIDE CHANNEL COMPRESSORS AND VACUUM PUMPS

SC901MF

SC901MF8.5T-IE2 / 12.5T-IE2 / 18.5T-IE2



Costruiti secondo il principio dei canali laterali, funzionano sia in aspirazione sia in compressione e sono progettati per lavorare a servizio continuo. Realizzato in alluminio pressofuso garantisce la massima robustezza e maneggevolezza. Non occorre lubrificazione in quanto non c'è contatto tra le parti statiche e rotanti. Particolari silenziosi contribuiscono ad ottenere un elevato livello di silenziosità.

Construction of the ring blowers fans is based on the lateral ducts principle. The blowers can operate as either exhaust or compression fans and are designed for continuous service. The device is assembled directly on the motor shaft; all the rotating parts are dynamically balanced to ensure absolute absence of vibration. Full die-cast aluminium construction for maximum sturdiness and ease of handling.




Curve Curva n.	Model Modello n.	Frequency Frequenza (Hz)	Output power Potenza (kW)	Voltage Voltaggio (V)	Rated current Assorbimento (A)	Noise Rumorosità dB (A)	Weight Peso (Kg)
1	SC901MF8.5T-IE2	50	8,5	400/690	17.4Δ/ 10.0Y	74	93
2	SC901MF8.5T-IE2	60	9,8	460/720	16.5Δ/ 9.5Y	79	93
3	SC901MF12.5T-IE2	50	12,5	400/690	23.9Δ/ 13.7Y	74	116
4	SC901MF12.5T-IE2	60	14,5	460/720	22.7Δ/ 13.0Y	79	116
5	SC901MF18.5T-IE2	50	18,5	400/690	34.7Δ/ 20.0Y	74	126
6	SC901MF18.5T-IE2	60	21,3	460/720	34.1Δ/ 19.6Y	79	126




I.VA.CO. SRL
Italian Vacuum Compressors
Via delle Brigole, 33
23877, Paderno D'Adda, -LC-
Italy
www.ivaco.it



ASPIRAZIONE / EXHAUST

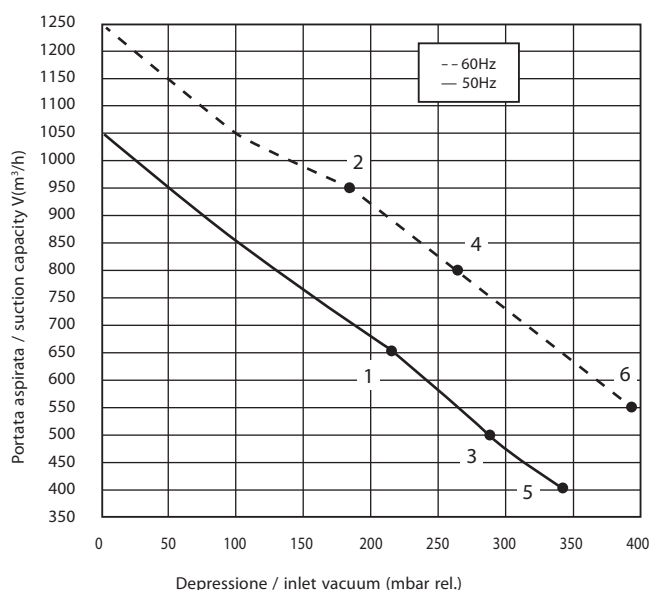

COMPRESSIONE / COMPRESSION

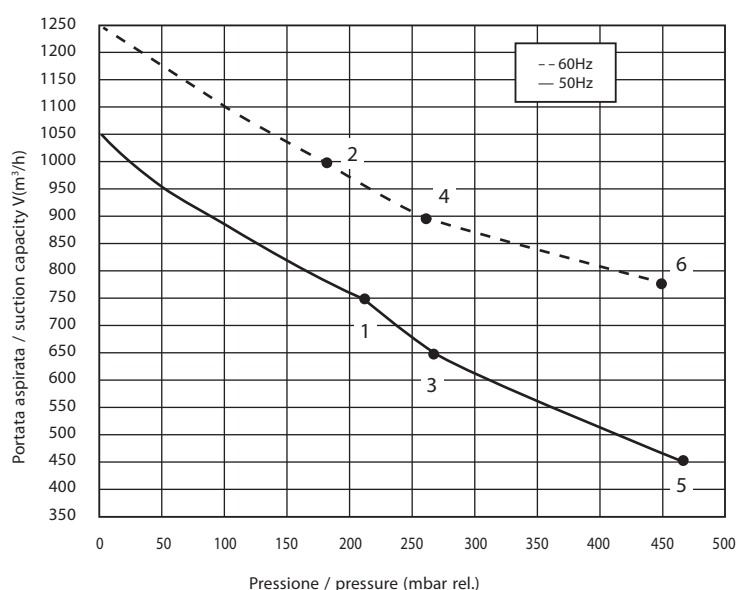

I valori di portata e pressione si intendono per il convogliamento dell'aria avente in aspirazione temperature di 15°, densità di 1,23 kg/m³ e pressione a 1.013 mbar. La tolleranza di queste curve si intende del ±10%. I dati sopraindicati possono essere variati senza preavviso.

The characteristic data given here refer to the handling of gas with inlet temperature of 15° C, normal density of 1,23 kg/m³ and absolute pressure of 1.013 mbar. Tolerance of ±10%. The data may change without any notification.




COMPRESSORI-ASPIRATORI A CANALE LATERALE

**SIDE CHANNEL
COMPRESSORS AND
VACUUM PUMPS**

SC901MF8.5T-IE2 / 12.5T-IE2 / 18.5T-IE2



Dimensioni / Dimensions = mm

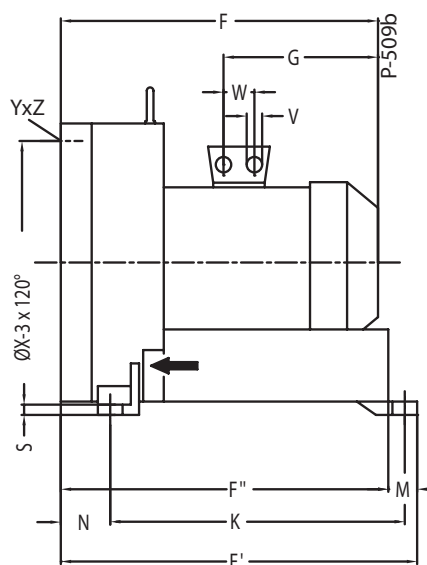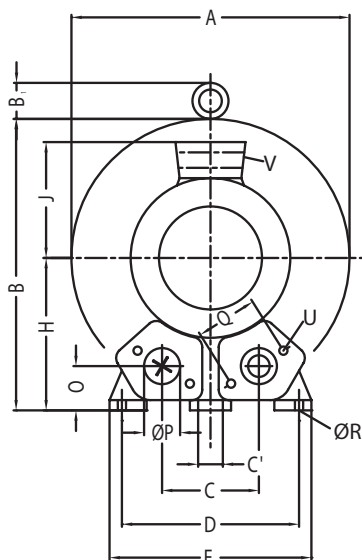

I.VA.CO. SRL
Italian Vacuum Compressors
Via delle Brigole, 33
23877, Paderno D'Adda, -LC-
Italy
www.ivaco.it

	Phase Fase	A	B	B'	C	C'	D	E	F	F'	F''	G	H	J	K	M	N	O	ØP	Q	ØR	S	U	V	W	ØX	YxZ	X-holes X-fori
SC901MF8.5T-IE2	3~	550	569	55	207	15	360	415	525	644	605	268	300	167	533	39	89	92	G4"	150	15	21	M12x30	4xM32x1.5	42	490	M12x30	0°/120°/240°
SC901MF12.5T-IE2	3~	550	569	55	207	15	360	415	611	644	605	345	300	197	533	39	89	92	G4"	150	15	21	M12x30	4xM40x1.5	54	490	M12x30	0°/120°/240°
SC901MF18.5T-IE2	3~	550	569	55	207	15	360	415	611	644	605	345	300	197	533	39	89	92	G4"	150	15	21	M12x30	4xM40x1.5	54	490	M12x30	0°/120°/240°